




SodaStream Source Internal Disassembly

Prerequisite Only

Written By: Angela Mossgrove

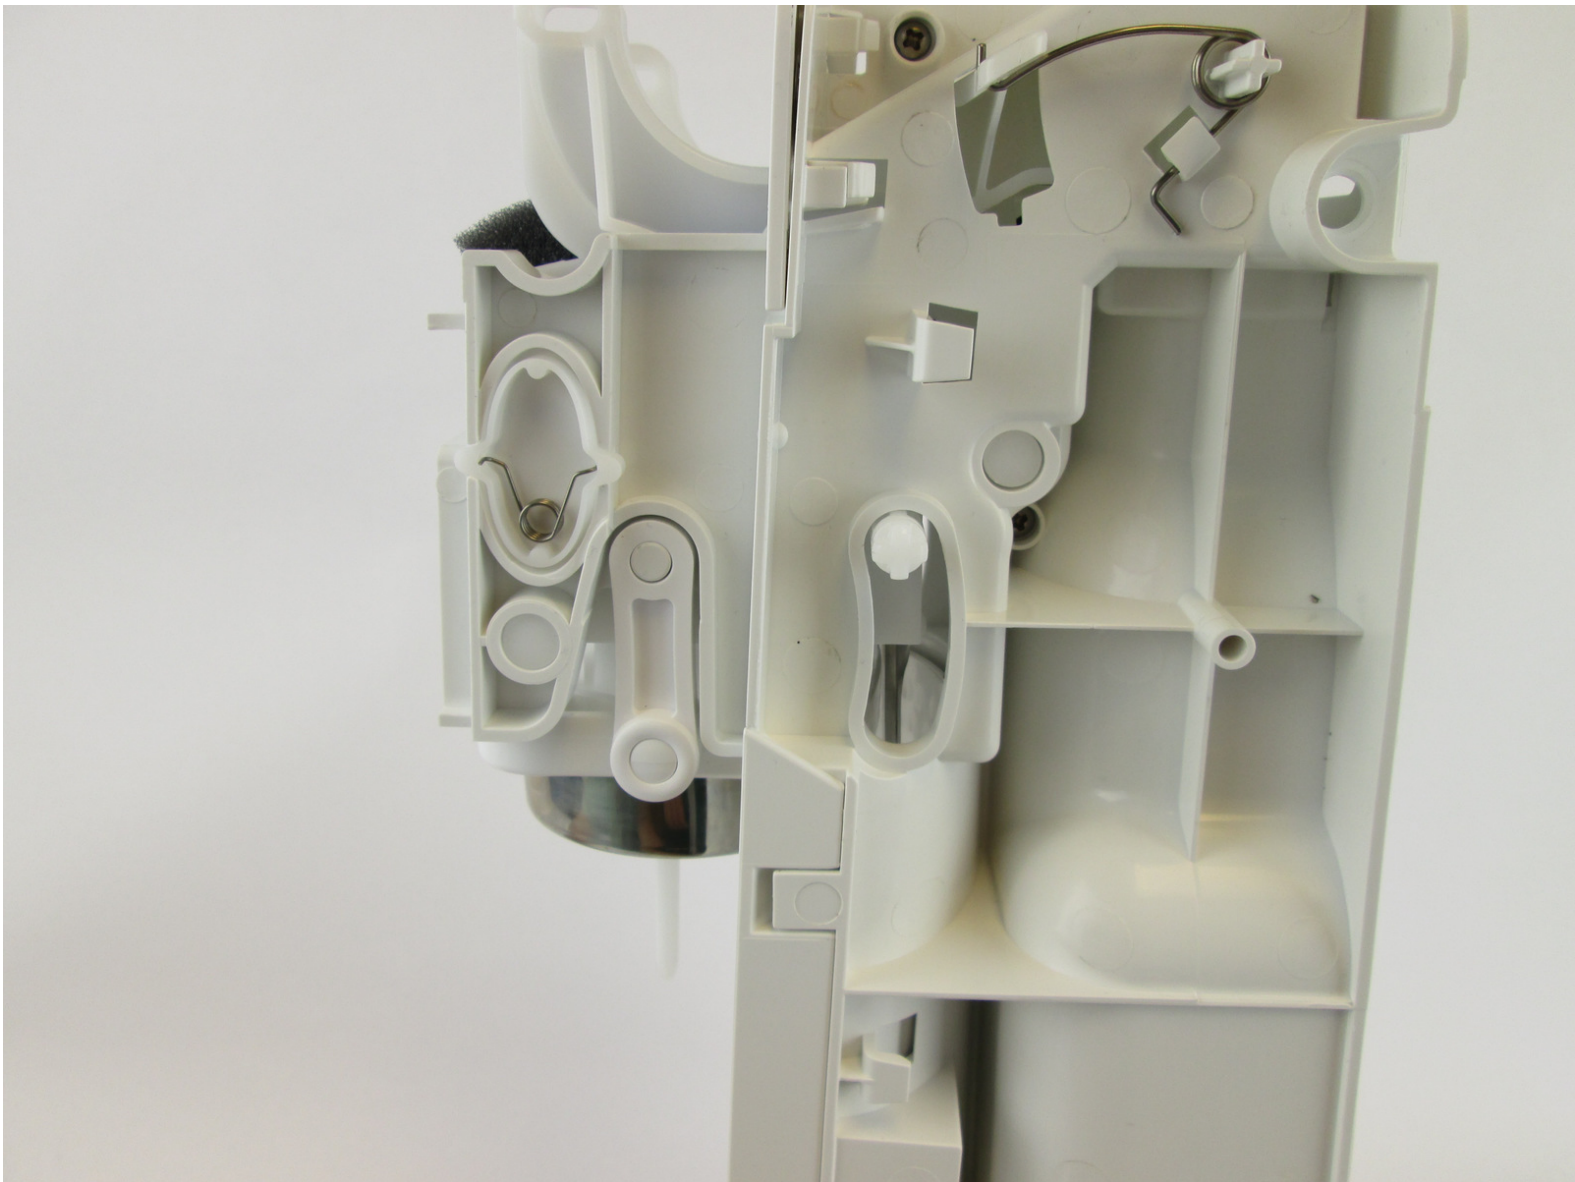




TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-


Step 1 — SodaStream Source Internal Disassembly

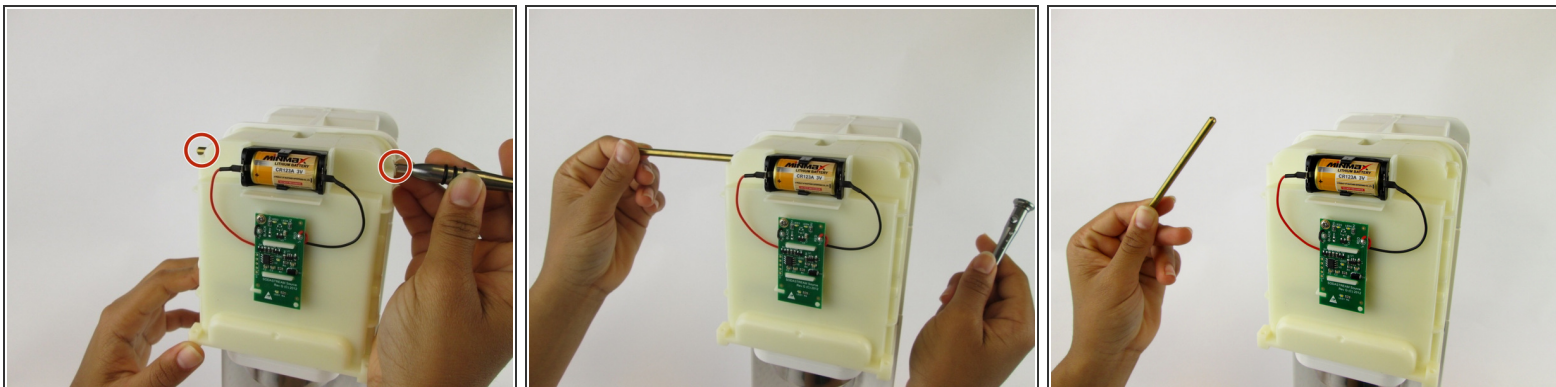

- Push the gold bar, located in the top of the device, out of the carbonating block.



i You can use the end of your screwdriver to push this piece out.

Step 2

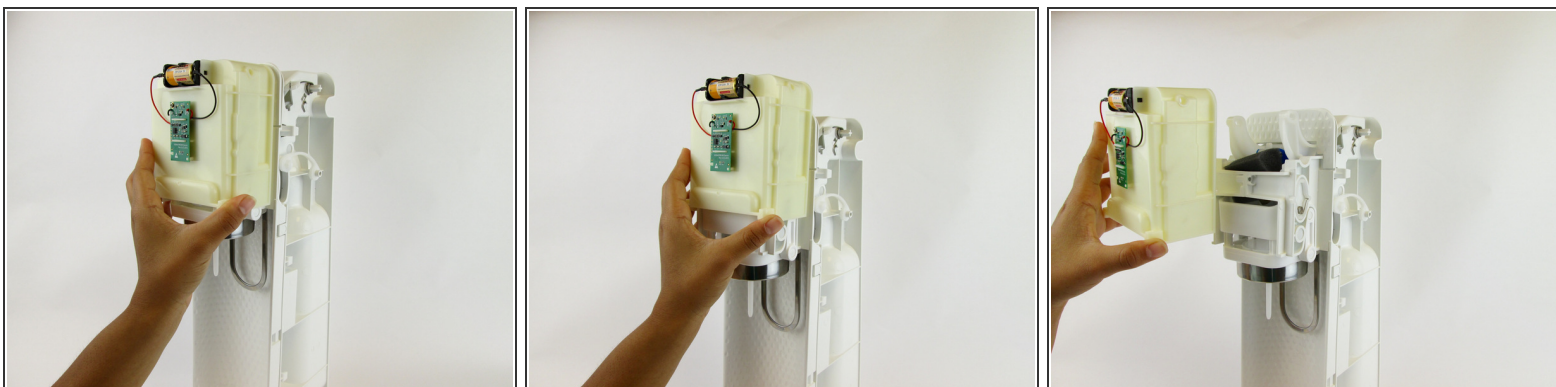



- Slide the yellow battery cover up and away to remove it from the device.

Step 3

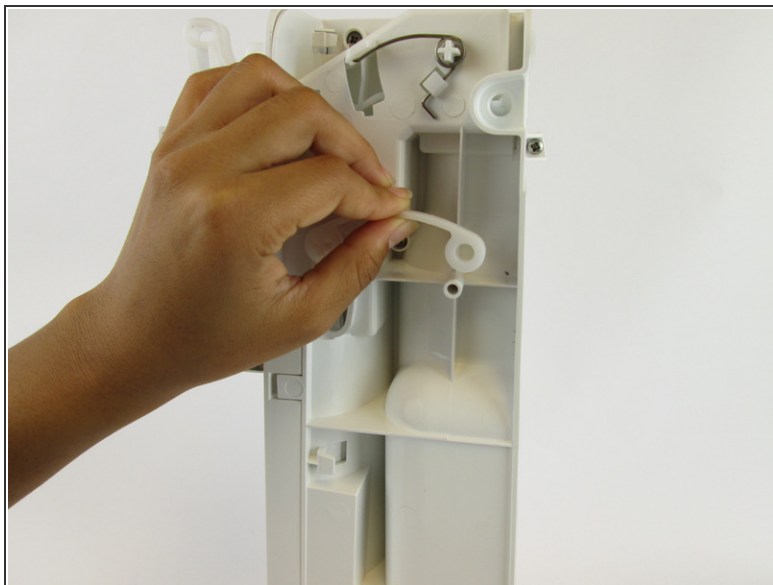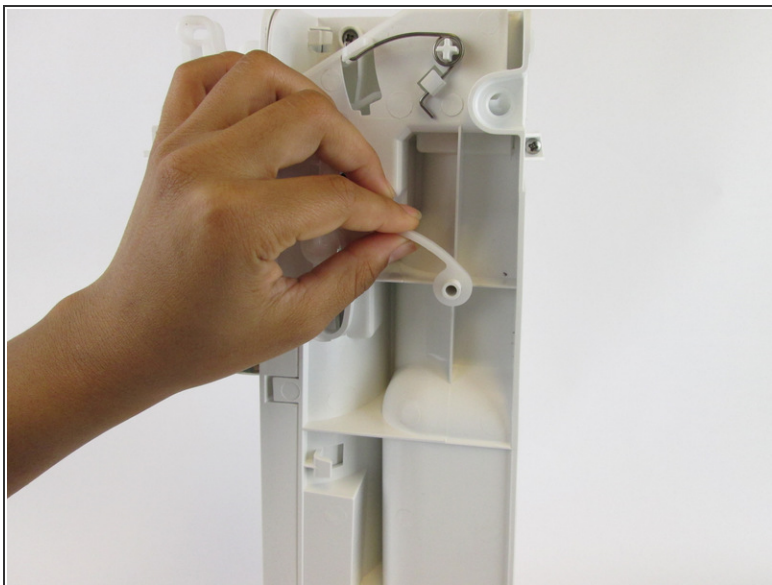



- Unhook the bottom piece of the plastic arm on each side of the device.

Step 4

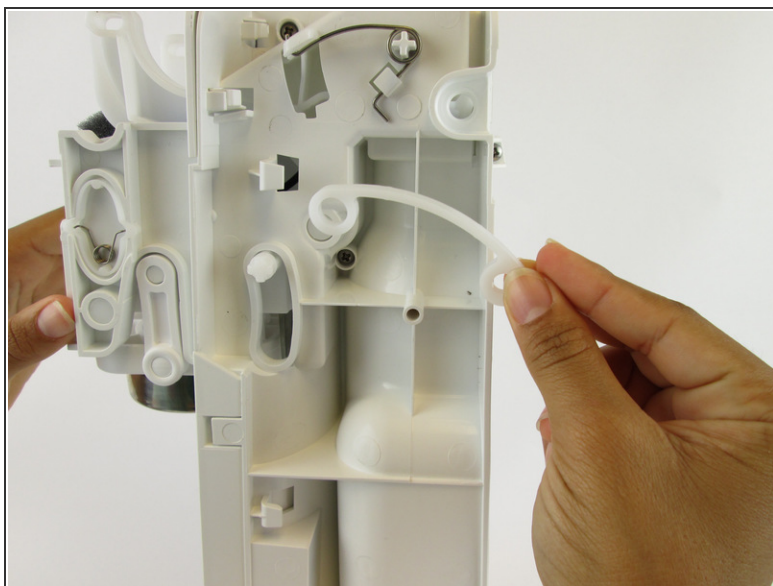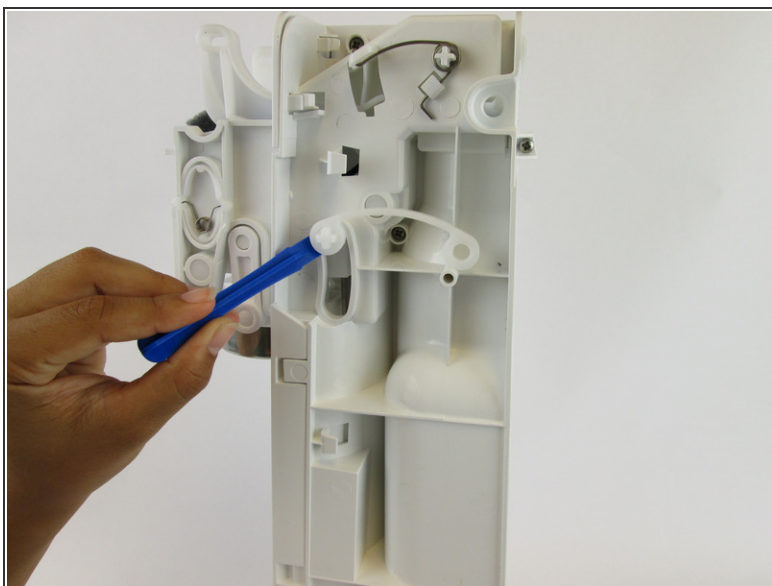



- Lift the top of the plastic arm with the spudger and remove it on both sides.

Step 5

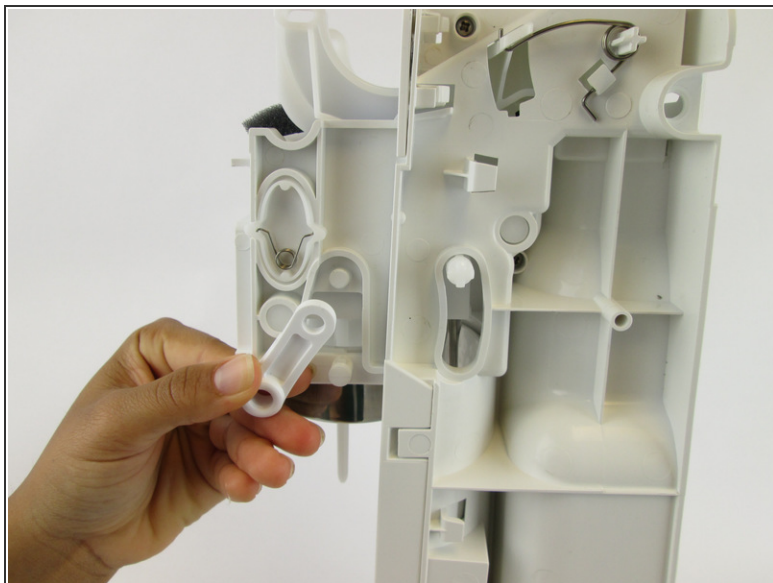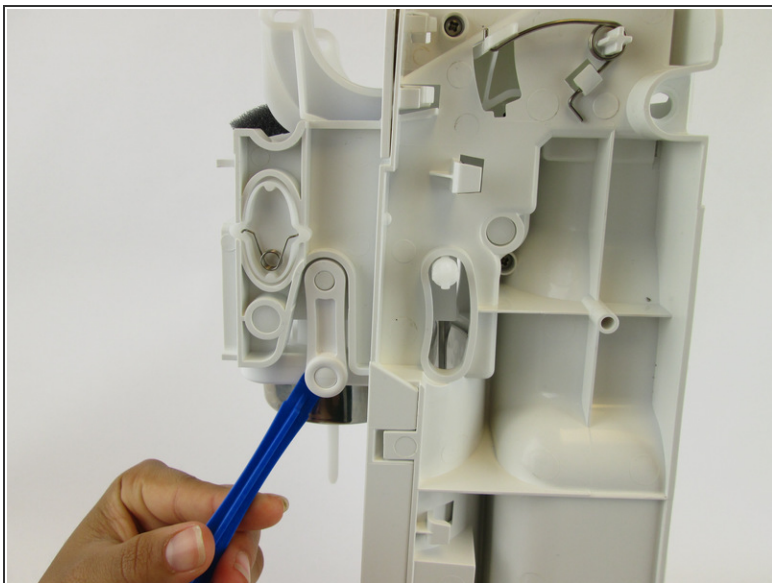


- Remove the plastic piece, located near the front of the carbonating block, from both sides of the device using a plastic opening tool or nylon spudger.

Step 6

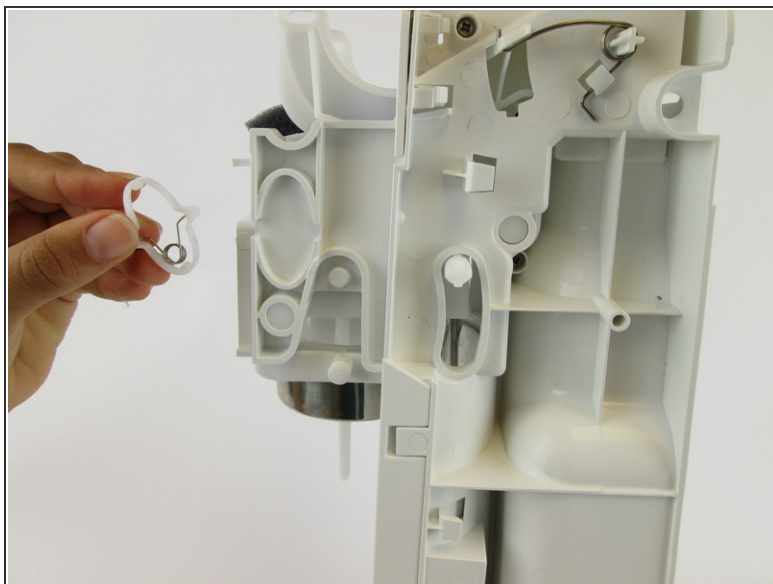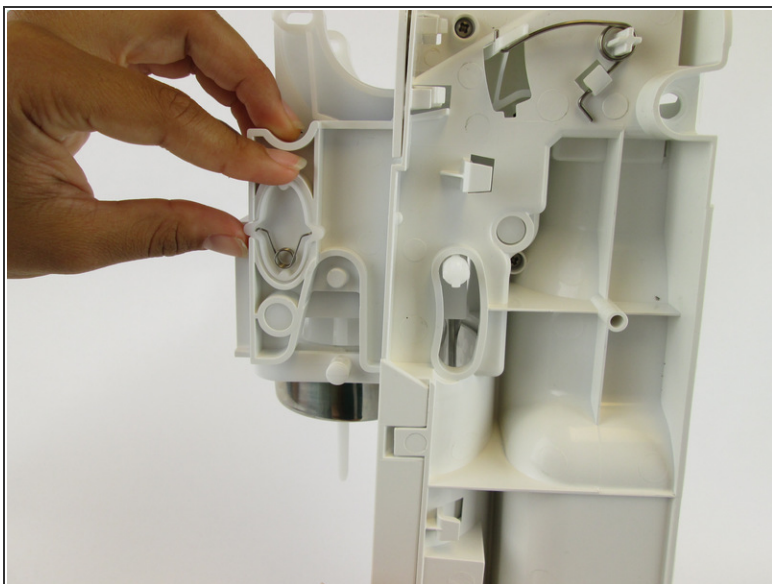


- Remove the plastic oval and the spring within it.

Step 7

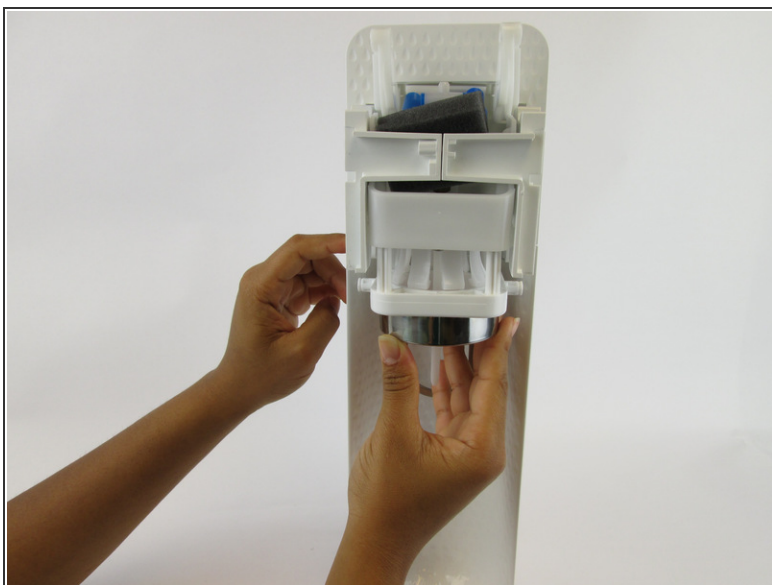



- Pull the loader tab cover down and away from the rest of the carbonating block.

Step 8

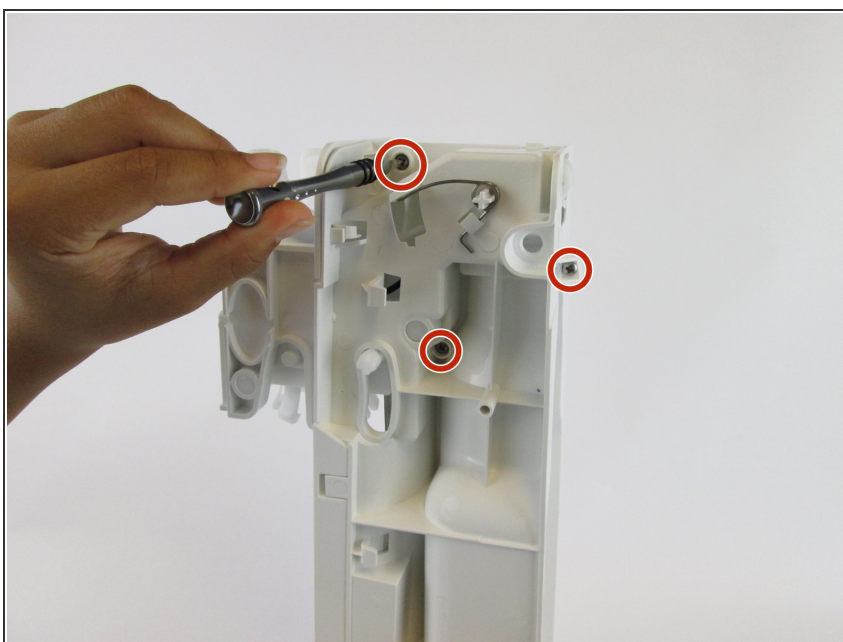




- Remove the three 17.9 mm screws located on the right side.
- ⓘ These screws may be difficult to access.

Step 9

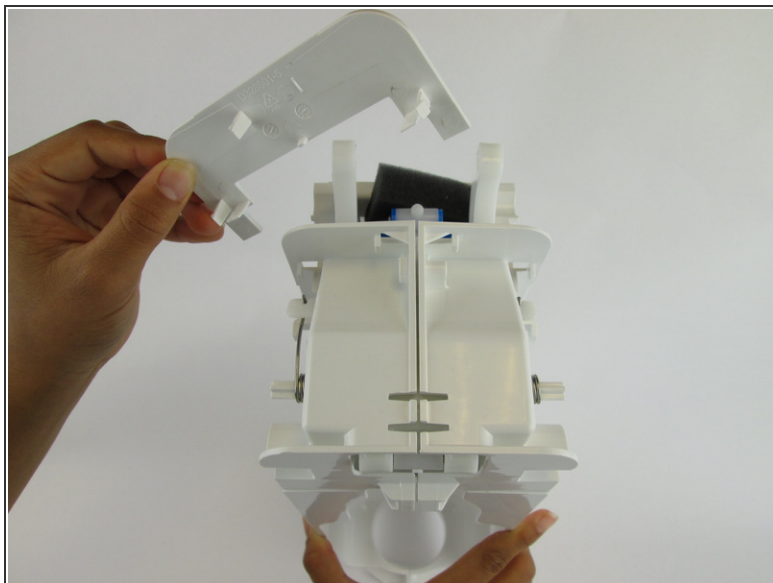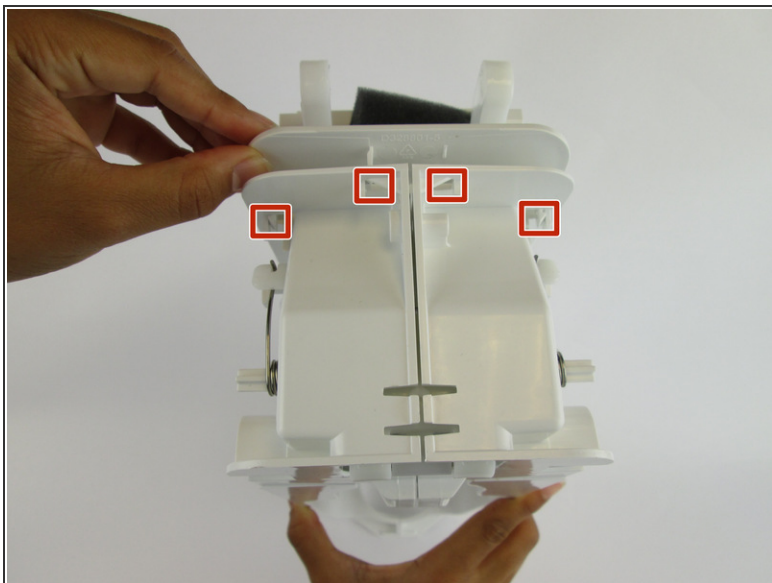



- Unhook the four clips on the top of the carbonating block and remove the plastic cover.

Step 10

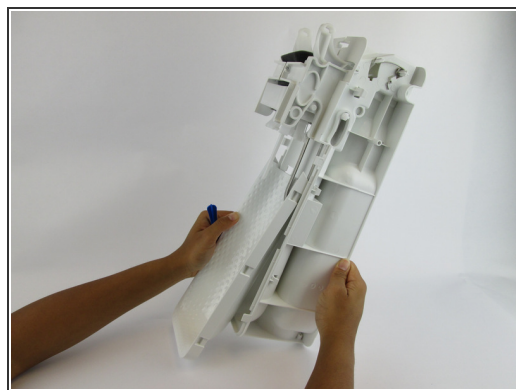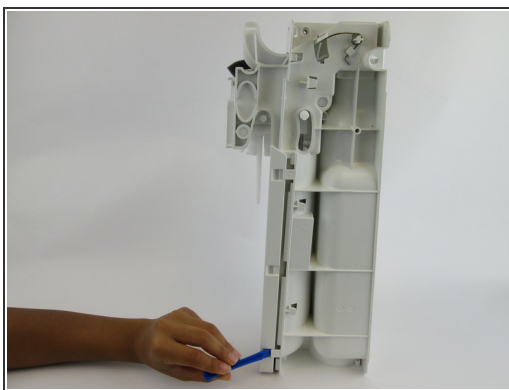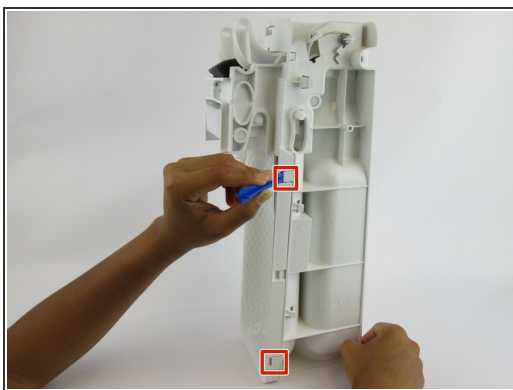


- Lift the clips located on both sides with the plastic spudger. Slide the front cover off.

Step 11

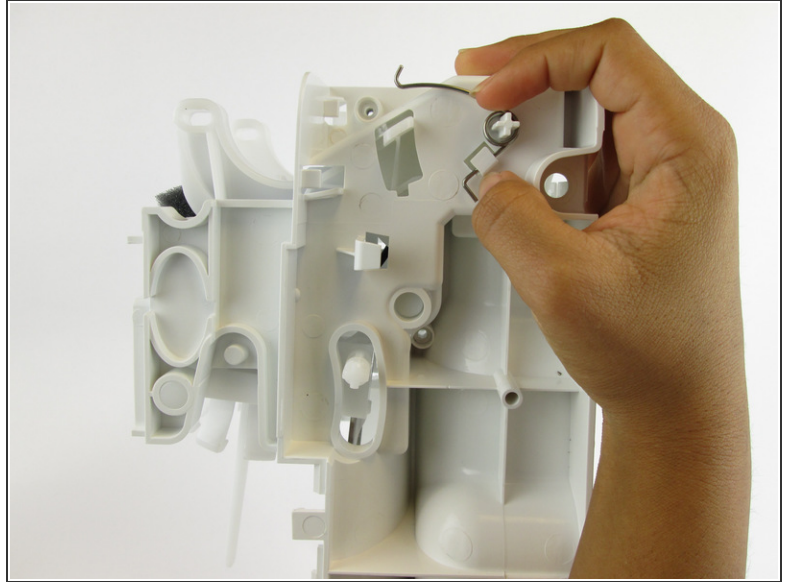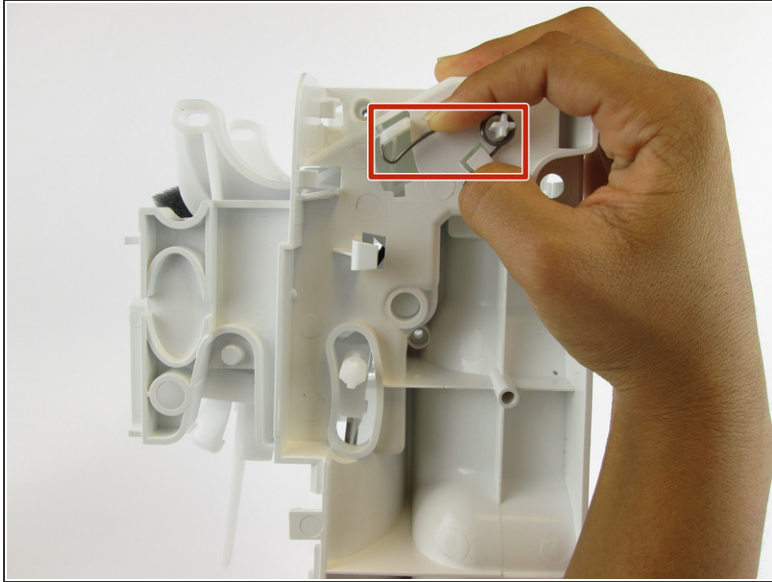




- Unhook the silver spring arms on both sides of the device by pushing down.

Step 12

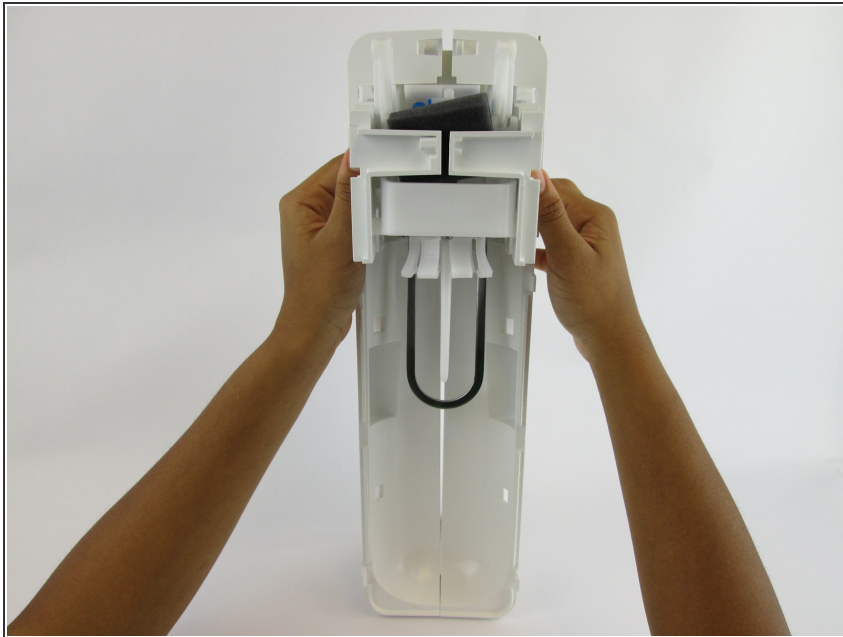


- Grip the right and left sides of the device and pull it into two identical halves.
- ⓘ Once these two pieces are apart, all remaining internal components will fall out of the device.

Step 13

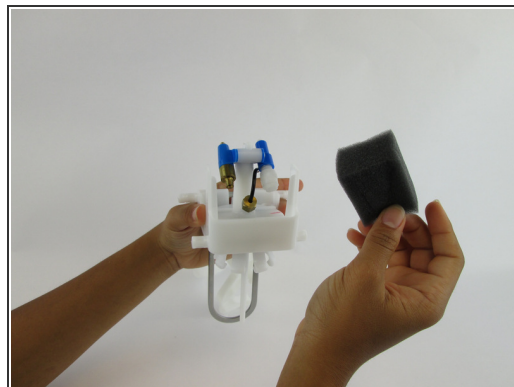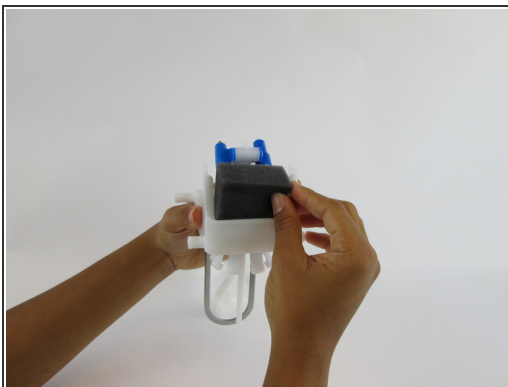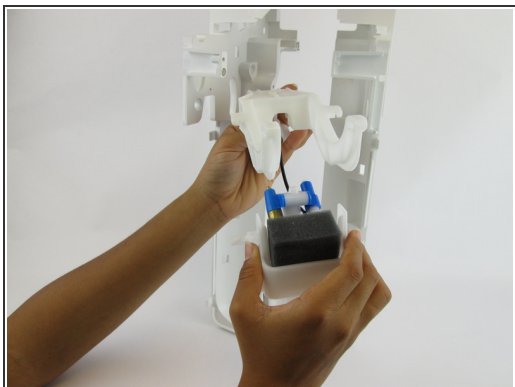


- Pull the foam pad up and remove it from the front side of the carbonation component.

Step 14

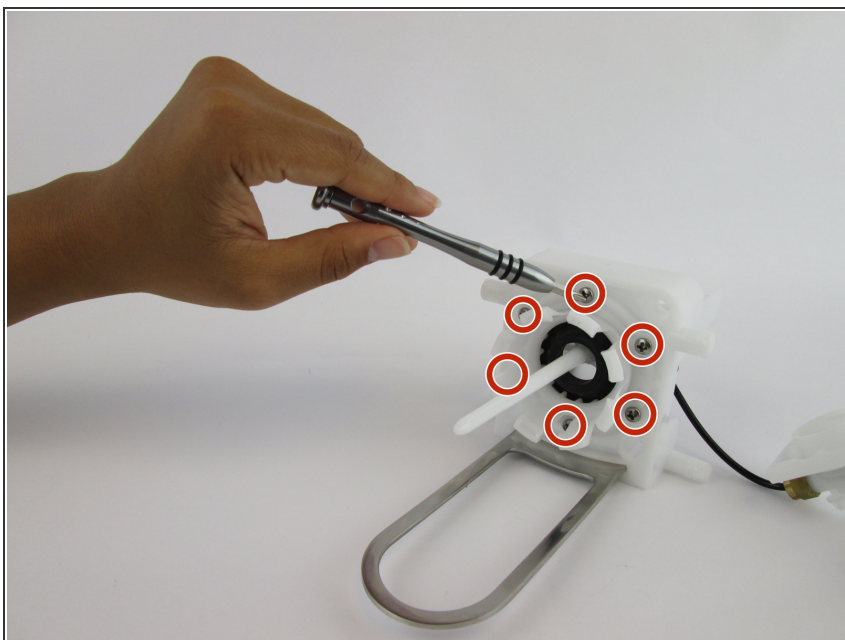

- Remove the six 17.7 mm screws from the underside of the loader tab piece.

Step 15

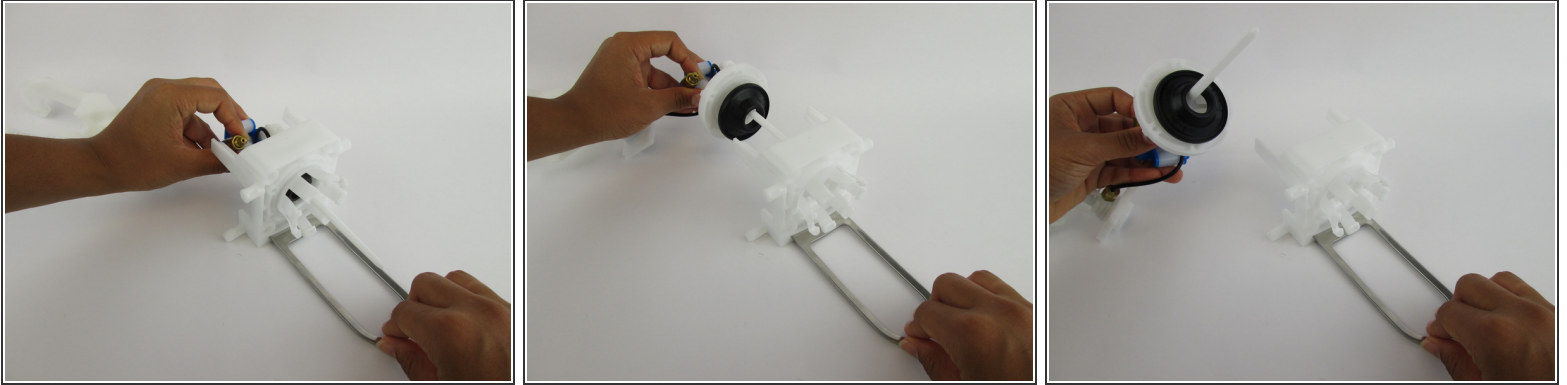

- Pull the loader tab out of the nozzle.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-04 12:52:31 AM.